


# Level 2 AC Smart EV Charger



Scan To  
Know More

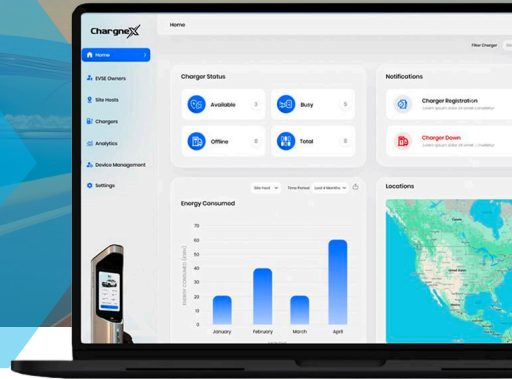

## Specifications:

### Electrical Specification

- Voltage : 208/240V L1, L2, Split phase\*
- Current : Up to 80 A
- Power Output : Up to 19.2 kW\*
- Connector Type : SAE J1772/Type 1/Type 2\*

\*Note- Customisable as per Region

### Connectivity & Communication

- OCPP Compliance 1.6J
- ISO 15118-2 : Plug & Charge (Hardware Supported)
- WiFi, Ethernet, Bluetooth & 4G Enabled

### User Interface

- Charger App With 10 Inch Capacitive Touch Display
- Start/Stop & Remote Monitoring
- EMV Open Loop, RFID, NFC Enabled EVSE with Smart Charger App

### Smart Feature

- CSMS Charger Management System
- Built in MID Energy Metering
- Charge Share: Unlock Charger via App to let others Charge & Earn

### Payment & Access Control

- EMV Cards - Tap to Pay, Start/Stop Charging, Plug & Charge
- QR Code Payment
- RFID Cards - Membership & Subscription

### Enclosure

- Charger : IP65
- Operating Temperature : -30°C to +70°C (-22°F to +158°F)

### Installation

- Wall Mount
- Pedestal Mount (Optional)
- Hardwire Junction Box (For Current > 50A) (Optional)
- Wirehook (Optional)
- Cable Length 5 Meters (Customisable)